

**Caution! Motor is hot after firing!
Allow motor to cool before handling.**

FOR YOUR SAFETY ALWAYS WEAR EYE PROTECTION

After Firing Cleanup

When the motor has cooled, remove both retaining rings and the nozzle washer (wear eye protection).

Remove the bulkhead from the motor case and discard the primary O-ring and the delay O-rings.

Using a wood stick, push the nozzle and liner tube out of the case.

Remove the nozzle O-ring and discard the liner and all of the O-rings in a proper receptacle.

Clean all motor parts with soap and water.

Before firing again, remove large deposits of slag from the nozzle face with a small screw driver. Small slag deposits can be ignored, but the nozzle throat hole must be clear. Slag often loosens on its own over several days.

Compare the two retaining rings and if their shape differs, replace both with new parts.

Disposal

In the unlikely event that a Loki Research reload kit needs to be disposed of due to damage or defects, it should be returned to Loki Research. Please contact Loki Research prior to shipment for instructions in this regard.

Safety & First Aid

Keep all reload kits away from sources of heat and flames and out of reach of children. When ignited, Loki Research propellant will burn slowly and will not explode. In case of accidental ignition, fight any fires with water. Foam and carbon dioxide are not effective against propellant fires. In the case of minor burns, apply first aid techniques and consult a physician. For more serious burns; immerse in cold water and seek immediate medical attention. Do not eat any part of a reload kit. In case of accidental ingestion, induce vomiting and call a physician immediately. Propellant consists mainly of ammonium perchlorate dispersed in a polyurethane synthetic rubber.

Disclaimer

Loki Research states that it has taken reasonable care in the design and manufacture of its products. However, as we cannot control the storage and use of our products, Loki Research cannot be held responsible for any personal injury or property damage resulting from storage, handling, or use of its products. Purchasers of Loki Research products hereby acknowledge this, and will hold Loki Research, LLC, it's owners, employees, and subcontractors, blameless and harmless for any and all actions of the purchaser and user.

Limited Warranty

What does this warranty cover? We warrant each reload to be free from defects in material and workmanship. Our obligation under this warranty is limited to replacement or repair, at our discretion, of the reload and/or the Loki Research motor hardware only. Proof of purchase required.

How long does the warranty last? This warranty runs for one year from the date of original purchase.

What does the warranty not cover? This warranty does not cover defects or damage to airframes, vehicles, or other devices in which a rocket motor may be used, or to any support equipment they may require. This warranty does not cover defects or damage which result from abuse, misuse, negligence, or accidents. Also, consequential and incidental damages resulting from the use of this product or arising out of any breach of contract or breach of this warranty are not recoverable under this warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above may not apply to you.

Loki Research, LLC
5301 Tacony St, Box 210
Philadelphia, PA 19137
www.lokiresearch.com

BORN ON:
Made in USA

**LOKI RESEARCH
ROCKET MOTORS
HIGH POWER RELOAD KIT**

This package contains one reload kit for use with
Loki Research 38mm rocket motors or equivalent*

*see www.lokiresearch.com for hardware specifications

J1000

Delay time is adjustable from 5 to 17 seconds


Loki White propellant, white flame with white smoke

WARNING-FLAMMABLE: Keep out of reach of children. Do not use near open flame. Not for sale to persons under 21years of age. For use by certified High-Power users only.

Do not open until ready for use.

	Nozzle Size	Case Length	Total Impulse	Loaded Motor Weight	Propellant Weight	Delay Times (seconds)
						XS S M L XL
J1000	#28 0.437"	24.6"	1200 N-sec	1143 g	573 g	5, 8, 10, 13, 17

Important! The correct nozzle must be used or motor failure may occur!
Check the number engraved on the nozzle against this table.

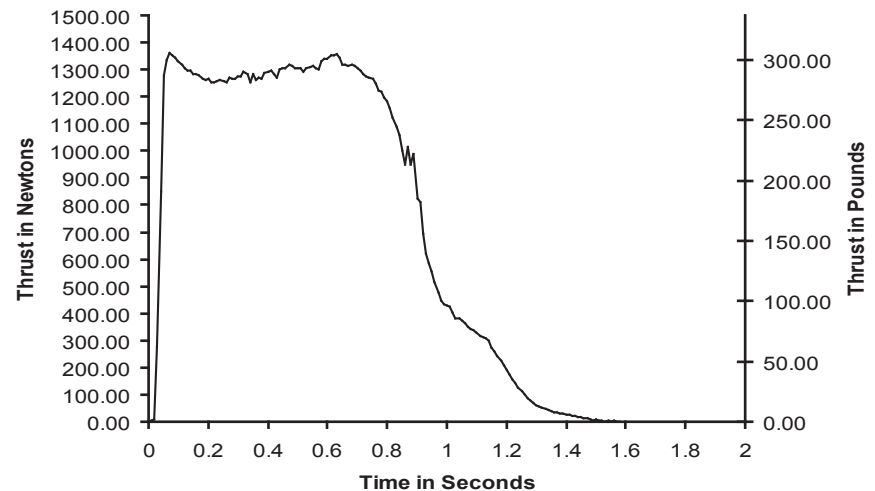

Assembly Instructions

FOR YOUR SAFETY ALWAYS WEAR EYE PROTECTION

1. Check that all hardware pieces are clean and free of grease and soot. In particular, check and clean the retaining ring grooves and the delay cavity in the bulkhead.
2. Place the six delay O-rings (small, 3/32" thick) around the delay element, then rub a light coat of grease on the outsides of the O-rings. Avoid getting grease on the ends of the delay element (Figs 1 and 2).
3. Place the delay element stack on end, on a flat surface. Place the bulkhead over the stack and press down until the end of the delay element is flush with the bulkhead (Fig 3).
- 3a. If desired, use the delay adjustment tool (Loki-DAT) to reduce the delay time.
4. Coat the primary O-rings (large, 1/8" thick) with grease. Install one Primary O-ring onto the bulkhead O-ring groove and one Primary O-ring onto the nozzle O-ring groove.
5. Push the recessed shoulder of the nozzle into the end of the liner tube marked "Nozzle end", slide together (liner tube first) into the thrust ring end of the motor case (see diagram below). **Be sure to use the correct size nozzle** (see table on front page).
6. Place the stainless steel nozzle washer against the nozzle and install the retaining ring using appropriate retaining ring pliers. Always wear eye protection.
7. Stand the motor upright on the nozzle end and slide the second section of liner and propellant into the case.
8. Install the assembled bulkhead into the top of the motor and secure with the second retaining ring. (see diagram below). If there is a gap between the bulkhead and retaining ring, pull the bulkhead up flush against the retaining ring. There will be a small amount of empty space in the case and the grains may rattle. This is normal.
9. Fill the ejection well with the desired amount of black powder (or leave empty for no ejection). **Place some wadding on top of the black powder** to hold it against the touch hole before installing the red plastic cap over the ejection well (see diagram below).
10. Make a final visual inspection to ensure that both retaining rings are fully seated in their grooves. The motor can now be installed in the rocket. Use positive mechanical means to prevent the motor from being ejected during flight.
11. Install an electrical igniter only when at the launch pad. Slide the igniter through the nozzle all the way up until it touches the delay element. **Then pull it back 1/2 inch.** Secure in place with tape or use other means to prevent the igniter from sliding down.
12. Fire from a safe distance in accordance with NFPA code 1127 and the rules of your launch site. **CAUTION! Motor will be hot after firing!** Allow to cool before handling.

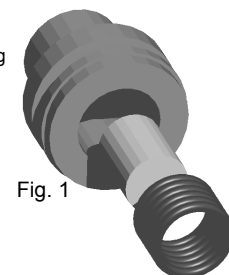


Fig. 1




Fig. 2



Fig. 3

Before you begin:

Read the instructions completely and study the diagrams. Use the reload kit only in accordance with all instructions. Review the parts list and if any parts are missing or damaged, contact your Loki Research dealer for replacements. Note that in some reloads the liner tube is packaged separately from the other parts.

Parts List:

<input type="checkbox"/> Motor Hardware	
<input type="checkbox"/>	motor case with thrust ring <input type="checkbox"/> 1
<input type="checkbox"/>	graphite nozzle <input type="checkbox"/> 1
<input type="checkbox"/>	forward bulkhead <input type="checkbox"/> 1
<input type="checkbox"/>	nozzle washer <input type="checkbox"/> 1
<input type="checkbox"/>	retaining rings <input type="checkbox"/> 2
<input type="checkbox"/> Reload Kit	
<input type="checkbox"/>	Liner tube containing propellant <input type="checkbox"/> 2
<input type="checkbox"/>	Primary O-rings (1/8" thick) <input type="checkbox"/> 2
<input type="checkbox"/>	Delay O-rings (3/32" thick) <input type="checkbox"/> 6
<input type="checkbox"/>	Delay element <input type="checkbox"/> 1
<input type="checkbox"/>	Red Cap containing Black Powder <input type="checkbox"/> 1

Required, but not supplied:

<input type="checkbox"/>	Internal retaining ring pliers.*
<input type="checkbox"/>	Loki Research Delay Adjustment Tool (Loki-DAT)
<input type="checkbox"/>	O-ring lubricant**
<input type="checkbox"/>	Electric motor igniter
<input type="checkbox"/>	Protective Eyewear

* we recommend "Knipex" brand retaining ring pliers. These may be purchased from www.mcmaster.com, use part #5449A92.

**Use petroleum jelly, synthetic automotive greases, silicone based greases, or even saliva.

